


Synergy Quad II, 1x 20W/35W (CDM-Tm)  
Recessed Gimbal fixture



Other options 2 & 3-way

Codes: MCDL.701.90.\*\*  
(MCDL-702.\*\* / MCDL-703.\*\*)



**Features**

1-way, Gimbal lamp recessed downlight for CDM-Tm 20 / 35W. Complete with connected ballast to suit.


- Simple ceiling fixings
- Suitable for Mini CDM-Tm 20/35W
- Easy lamp replacement
- Multi directional
- Quick release twist and lock bezel
- Low refraction safety glass

**Electrical data**


Ballast input:	230/240V, 50/60Hz
Power value:	68VA=0,4A
Secondary output voltage:	$\hat{U}=4,5kV$
cos $\phi$	0,84
Safety:	Short circuit, thermal and overload protection
Class:	I
SHF Ballast 35W	ENEC 14

**Lamp and photometric data**

e.g. Philips MASTER CDM-Tm 35W WW/831  
Base: PGJ 5  
with ASTERION High Performance Reflector

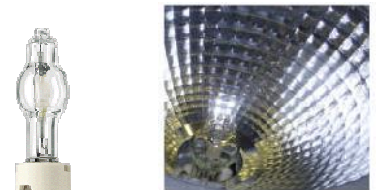


High efficient Facet Reflector  
Spot or Medium

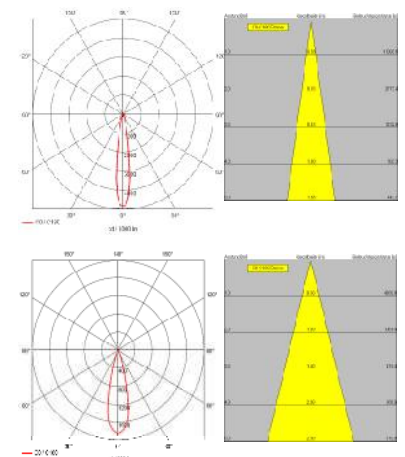

**Technical data**

Dimensions:	
1 lamp version: cut-out:	185x185mm, h: 125mm 165x165mm
2 lamp version: cut-out:	185x345mm, h: 125mm 165x325mm
3 lamp version: cut-out:	185x505mm, h: 125mm 165x485mm
Max. ceiling thickness:	30mm
Material:	Plated steel and aluminium
Installation:	ceilings with normal F rating.
Bezel colour:	Silver-grey
Lamp base :	PGJ5 Twist & Lock

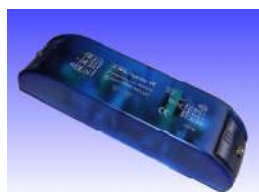

**Safety codes**

General :	EN 61347 EN 60598
EMC	EN 55015 EN 61000-3-2 EN 61547

**Contact details**

IBL Lighting GmbH  
Christinenstr. 3  
D-40880 Ratingen  
Tel: 02102- 94 20 66 0  
Fax: 02102- 94 20 66 6  
web: [www.ibl.eu](http://www.ibl.eu)  
email: [info@ibl.eu](mailto:info@ibl.eu)